



GEN2 CLARIS LED Retrofit Kits

1'x8' Linear Troffers

LED Living Technology's GEN2 CLARIS LED Retrofit Kit is the next generation in energy efficient LED upgrades for linear fluorescent troffers. Payback has never made more sense with 65-80% energy savings over fluorescent lamps and up to 24 years operation once installed.

1'x8' upgrades include system efficacies ranging from 148-164lm/W, increased thermal performance for extended LED lifetimes exceeding 200,000hrs, and the integration of permanent rare-earth magnets for easy and quick installation.

KEY SPECIFICATIONS

Housing For Upgrade LED Retrofit	1'x8' (305mm x 2440mm)
Input Power	24W, 30W, 45W, 68W
Input Voltage	120-277VAC
Delivered Light Output*	24W - up to 3700 lms 30W - up to 4900 lms 45W - up to 7000 lms 68W - up to 10,200 lms
System Efficacy w/LED Power Supply*	24W - up to 151lm/W 30W - up to 164lm/W 45W - up to 157lm/W 68W - up to 148lm/W
CRI	82-86 CRI
CCT	2700K, 3000K, 3500K, 4000K, 5000K
System Lifetime	>60,000 hours (only driver replacement required)
LED Lifetime (L80 Lumen Maintenance)	>110,000 hours [see LED Lifetime chart for kit specific]
Controls	0-10V to 10%, Triac Dimming, ELV Lutron 2-Wire, Lutron 3 Wire, PWM, Resistance
Mounting	Existing linear fluorescent fixtures, w/Permanent Neodymium Magnets, and Rapid Thermafuse Technology
Limited Warranty	7 Years LED Power Supply, 10 Years all other components.

PROJECT NAME
ORDERING #



Emergency Battery Pack Ordering Example: **CLA-EM10**

Root	Emergency Battery Pack	Mounting Options
CLA	EM5 - >800 lumens / 5 Watts	Blank - Standard Integral Style No-Flex Unit
	EM7 - >1200 lumens / 7 Watts	TM** - Top Mount Non-Flex Unit
	EM10 - >1600 lumens / 10 Watts	A** - External Mount Dual Flex Unit
		J** - Box Mount Unit
		R** - Dual Flex w/Reflector-Mount
		R-J** - Single Flex w/Reflector-Mount

SEE PAGE 3 FOR DETAILS

KIT ORDERING

Example: **G2CLA-45-8-D-40-1K-18**

Model Root	Kit*	Dimming	LED Color	Quantity Of Kit Per Housing	Housing Type	Lens Adders
G2CLA	24-4 - 1 Lamp, 24W approx. 3700 lumens, 460 lm/ft	D - Standard 0-10V Low Voltage	27 - 2700K	1K - Standard 1 Kit	18 - 1X8	BLANK - No Lens SL21 - Frosted Snap-On LED Strip Covers for Parabolic Applications
	30-4 - 1 Lamp, 30W approx. 4600 lumens, 580 lm/ft	T - Triac / ELV - Available only in 24W, 30W	30 - 3000K	2K - Custom 2 Kits		
	45-4 - 1 Lamp, 45W approx. 6500 lumens, 810 lm/ft	A - Lutron 3 Wire Dimming - Available only in 24W, 30W	35 - 3500K			
	30-8 - 2 Lamp, 30W approx. 4900 lumens, 610 lm/ft	E - Lutron 2 Wire Dimming - Available only in 24W, 30W, 45W	40 - 4000K			
	45-8 - 2 Lamp, 45W approx. 7000 lumens, 880 lm/ft		50 - 5000K			
	68-8 - 2 Lamp, 68W approx. 10,200 lumens, 1,280 lm/ft					

* Lumen values are based on LED CCT of 5000K maintaining a tolerance of +/- 5%. **Special Order.





GEN2 CLARIS LED Retrofit Kits

1'x8' Linear Troffers

PRODUCT SPECIFICATIONS

The GEN2 CLARIS LED Retrofit Kit was designed as a powerful step-up over existing LED Upgrade retrofit kits. Power Supply Efficiency, LED Efficiency, Thermal Performance, Ease of Installation, and Controllability were all optimized and improved upon with the latest and most advanced components. Affordability through innovation, has always been LED Living Technology's design approach and with the GEN2 CLARIS LED Retrofit Kit, LLT has once again raised the bar in LED retrofit kit performance, while improving upon energy savings, and cost.

ELECTRICAL PERFORMANCE

Input Voltage: 120-277VAC ALL LED DRIVERS
 Frequency Range: 47 ~ 60Hz

MODEL	DIMENSIONS	CONTROL COMPATIBILITIES								PROTECTIONS	THD (TOTAL HARMONIC DISTORTION)	POWER FACTOR	AMBIENT OPERATING TEMPERATURE
		Dimmable Range	0-10V	Ω	PWM	TRIAC (120V)	ELV	Lutron 3-Wire	Lutron EcoSystem				
G2CLA-XX-X-D	L 163mm x W 43mm x H 32mm L 6.41in x W 1.69in x H 1.26in	10%	✓	✓	✓					Short Circuit/Over Current [95-108%] Over Voltage [28 ~ 35V]/Over Temp.	<20%	>.9	-40°F (-40°C) ~ 122°F (50°C)
G2CLA-XX-X-T	L 84mm x W 40mm x H 25.3mm L 3.3in x W 1.57in x H 1in	1%	✓			✓	✓			Short Circuit/Over Current/ Over Temp/Output Open Load	<20%	>.9	-22°F (-30°C) ~ 122°F (50°C)
G2CLA-XX-X-A	L 359mm x W 30mm x H 25mm L 14.13in x W 1.18in x H 1in	1%						✓	✓	Short Circuit/Inrush Current limiting <2A / Over Temp/ Open Circuit Protected Output	<20%	>.9	32°F (0°C) ~ 122°F (50°C)
G2CLA-XX-X-E	L 359mm x W 30mm x H 25mm L 14.13in x W 1.18in x H 1in	5%							✓	Short Circuit/Inrush current less than NEMA 410-2011 limit/Overload-protected output/Open-Circuit Protected Output	<20%	>.9	32°F (0°C) ~ 122°F (50°C)

THERMAL PERFORMANCE & LED LIFETIME

Information in the chart below reflects individual LED Drive Currents, Measured LED Junction Temperatures installed in troffer housing, and LED Lifetime LM80 Testing.

MODEL	LED JUNCTION TEMPERATURE @25C [77°F] AMBIENT	LUMEN MAINTENANCE @10,000 HRS	L80 LUMEN MAINTENANCE*	L70 LUMEN MAINTENANCE**
G2CLA-24-4	33°C	99.55%	630,000 hrs	>850,000 hrs
G2CLA-30-4	35°C	99.16%	240,000 hrs	380,000 hrs
G2CLA-45-4	40°C	98.1%	110,000 hrs	180,000 hrs
G2CLA-30-8	29°C	100.1%	>850,000 hrs	>850,000 hrs
G2CLA-45-8	32°C	99.66%	>850,000 hrs	>850,000 hrs
G2CLA-68-8	36°C	98.88%	190,000 hrs	310,000 hrs

*Time in operation hours before an LED system reaches 80% lumen maintenance.
 **Time in operation hours before an LED system reaches 70% lumen maintenance.



GEN2 CLARIS LED Retrofit Kits

1'x8' Linear Troffers

COMPONENTS & MATERIALS

GEN2 CLARIS LED Retrofit Kits are RoHS Compliant, and vibration resistant. LED Boards are mounted with high performance slow-bonding thermally conductive adhesive, reinforced with permanent Neodymium magnets. All components are thermally managed, including LED power supply, for maximum system lifetime.

Table of Components

MODEL	TOTAL LED RAPID THERMAFUSE STRIPS	QTY DRIVER	CONNECTOR BOARDS	QTY 25" JUMPER CABLES	QTY 4" JUMPER CABLES	POWER SUPPLY SCREWS	OPTIONAL LED STRIP SCREWS	UL 1598c LABEL
G2CLA-24-4-W-XX-1K-18 G2CLA-30-4-W-XX-1K-18 G2CLA-45-4-W-XX-1K-18	4	1	1	1	3	2	4	1
G2CLA-30-8-W-XX-1K-18 G2CLA-45-8-W-XX-1K-18 G2CLA-68-8-W-XX-1K-18	8	1	1	2	6	2	8	1

EMERGENCY BATTERY PACK *CONSTANT POWER FOR UP TO 120 MINUTES WITH NO LIGHT DEGRADATION*





- Exceeds standard 90 minutes of illumination minimum
- Features IOTA's constant power technology for maximum sustained light output
- Able to purchase separately or at a later date and still maintain UL1598C rating
- Can be installed in past CLARIS LED RetroFit Kit Installations
- See CLA-EM Spec Sheet for specifications on new EM Battery Packs

LENS ACCESSORIES

LENS24 - Prismatic Upgrade Applications

Description: This .033" thick acrylic film diffuser overlays over existing Prismatic 2x4 A12 lenses. With beam shaping isotropic diffusion, individual LED hot spots are beam shaped into one continuous line for additional eye-comfort.

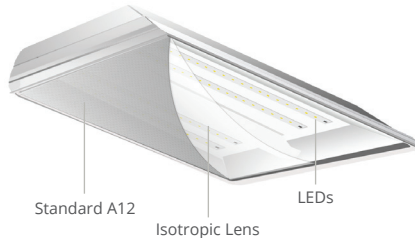


SL21 - Parabolic / Open Housing Applications

Description: Diffusion installs literally with a snap, with LED Living Technology's new and exclusive snap on frosted strip lenses. Designers will find an increased area of diffusion, as the LEDs and snap on diffuser are mounted directly to the back of the housing, effectively eliminating unsightly dark shadowing.



SL21 - Parabolic Snap on Lens Cover



2x4 Parabolic 24W 3 Strip Lens with SL21

ADDITIONAL SPECIFICATIONS

PHOTOMETRICS

Due to the quantity of options available we ask that you please contact an LED Living Technology lighting representative for Photometrics of your specific kit configuration. Photometrics are tested to IESNA LM-7908 standards.

THERMAL MANAGEMENT

LED Boards 21.3" x 1" and LED High Performance Drivers are equipped with Rapid Thermafuse Technology: thermally conductive industrial strength adhesive for recycling existing housing as effective heat sink material.

MOUNTING

5-10 minute install. Housing maintains its UL rating with the kit installed (UL1598C). Fluorescent lamps and ballasts are removed, housing is cleaned with a 70% min. alcohol solution. LED Strips in LED Upgrade Retrofit Kit are installed in existing housing with thermally conductive adhesive reinforced with **permanent rare earth magnets**, LED Power supply is mounted underneath existing ballast cover plate. Plug and play design.

Please refer to installation guide for complete installation instructions. Retrofit Housings will retain UL listing if complete Claris LED Retrofit kit is installed utilizing provided installation guide.

WARRANTY

10 Year Limited Warranty on all components with the exception of LED Power Supply.
7 Year Limited Warranty on LED Power Supply.

